



EPSON TM-T20III 打印机设置与驱动安装




目标: 确认打印机可以连线打印

先按住按钮然后再开机，这步是为了启动打印机的调试模式






开机后会弹出这样的小票，当中包含了打印机的信息，在小票的底部有根据按钮的时长来选项（黄色马克笔标记处）：小于一秒，继续本打印机测试；多于一秒，打印机调试选择模式。

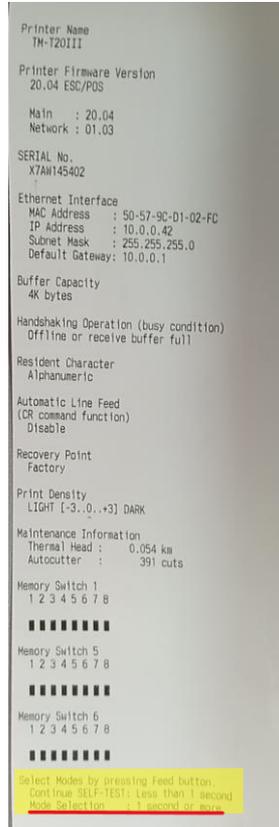

小票出来后再长按一秒后会出来这样的小票，此时已进入调试选择模式。

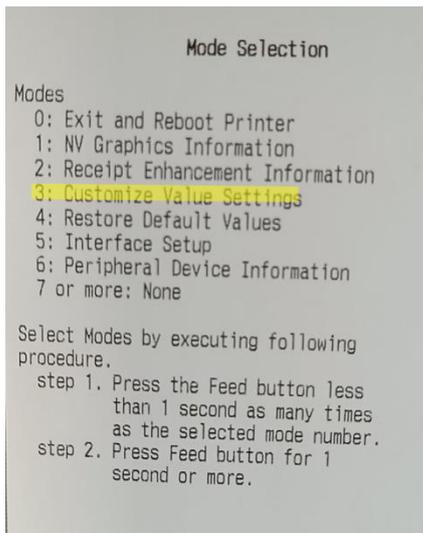

模式选择

模式：0：退出并重启打印机

1：NV 图形信息

2：收据增强信息

3：自定义值设置

4：恢复默认值

5：接口设置

6：外部设备信息


7 或更多：无

按以下步骤选择模式：步骤 1：按住进纸键少于 1 秒的时间，与所选模式的编号相对应的次数。

步骤 2：按住进纸键 1 秒或更长时间。



连接 3 下按键，第 4 下按久一点，进入自定义值设置

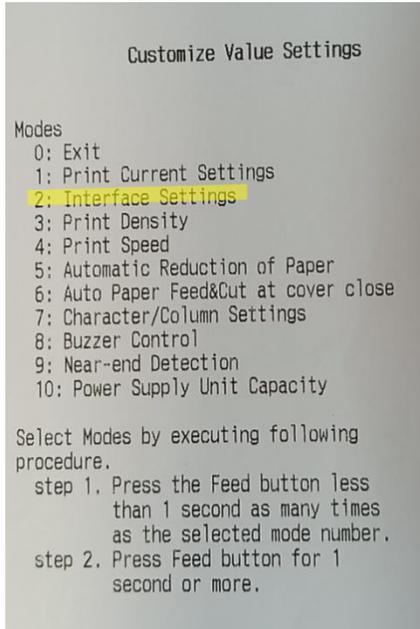

自定义值设置


模式：

- 0: 退出
- 1: 打印当前设置
- 2: 接口设置**
- 3: 打印浓度
- 4: 打印速度
- 5: 自动减少纸张
- 6: 封面关闭时自动进纸和切纸
- 7: 字符/列设置
- 8: 蜂鸣器控制
- 9: 检测纸尽
- 10: 电源容量

按以下步骤选择模式：

- 步骤 1: 按住进纸键少于 1 秒的时间，与所选模式的编号相对应的次数。
- 步骤 2: 按住进纸键 1 秒或更长时间。

连接 2 下按键，第 3 下按久一点 进入 Interface Settings

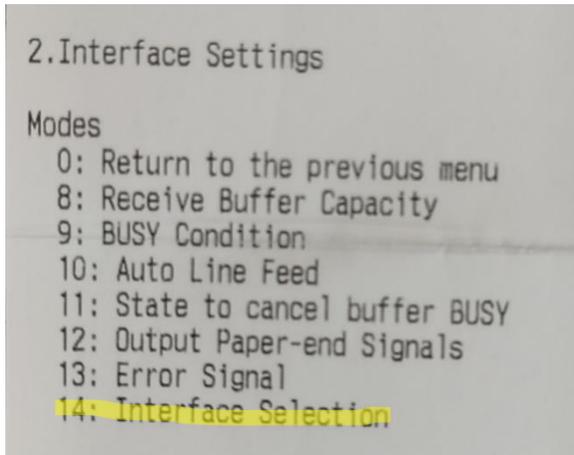

2. 接口设置

模式：

- 0: 返回上一级菜单
- 8: 接收缓冲区容量
- 9: 忙碌状态
- 10: 自动换行
- 11: 取消缓冲区忙碌状态
- 12: 输出纸尽信号
- 13: 错误信号
- 14: 接口选择**

连接 14 下按键，第 15 下按久一点 进入 Interface Selection



```
2.Interface Settings
2.14.Interface Selection

Modes
0: Return to the previous menu
2: Built-in USB
]*3: Ethernet
5: Auto
```

请注意 * 符号, 如果没有在5号上就需要更改

] means default value.
* means current set value.

2. 接口设置

2.14. 接口选择

模式:

- 0: 返回上一级菜单
- 2: 内置 USB
-] * 3: 以太网
- 5: 自动

] 表示默认值。

* 表示当前设置值。

更改方式如下:

连接 5 下按键, 第 6 下按久一点, 这样就选择好了

YouTube 西语视频作为参考 <https://www.youtube.com/watch?v=ZSL6N6vDSxM>



Driver 驱动安装

https://epson.com/Support/Point-of-Sale/Thermal-Printers/Epson-TM-T20III-Series/s/SPT_C31CH51001

EPSON

Printers Ink Projectors Scanners Point of Sale Robots Industries Support

Support / Point of Sale / Thermal Printers / Epson TM-T20III Series

Looking for POS manuals with programming codes? Log-in to our EPSON PARTNER PORTAL, go to SUPPORT, then select Point of Sale.

Epson TM-T20III Series

Model: C11CH1A972 | Product Home

Downloads Manuals and Warranty Registrations and Service Plans Contact Us

ATTENTION: Your operating system may not be detected below. It's important that you manually select your OS in the Operating System drop-down menu below to ensure you're viewing only compatible files.

Operating System: Please choose an OS ← 在这里选择电脑的系统

Please select your operating system above.

** By downloading from this website, you are agreeing to abide by the terms and conditions of Epson's Software License Agreement.

EPSON Advanced Printer Driver 6

Check Installation

This program will install EPSON Advanced Printer Driver 6 for TM-T20III on your computer. We recommend closing all Windows applications before running this setup program.

Please install "StatusAPI for EPSON Advanced Printer Driver 6", if you would like to use "Status API".

Click "Next" to start installing.

Note

Please use the version listed below and install the latest "StatusAPI for EPSON Advanced Printer Driver 6" on the PC, if you would like to use this software. Also, if you would like to use shared printer, please refer to the introduction guide.

- EPSON Advanced Printer Driver 5 Ver5.09 or later
- EPSON Advanced Printer Driver 4 Ver4.56 or later
- EPSON OPOS ADK Ver2.68 or later
- EPSON OPOS ADK for .NET Ver1.11.20 or later
- EPSON JavaPOS ADK Ver1.11.20 or later

Cancel Next >

